


12' FLEX WING ROTARY CUTTER



With its smooth top deck and spring suspension, the **Blue Diamond® 12' Flex-Wing Rotary Cutter** is ideal for medium duty applications such as weeds, grass, and brush up to 2" diameter. Designed for use with compact tractors as small as 35 hp, the cutter requires only one hydraulic outlet.

For its 144" cutting width, the cutter uses three independent spindles with two free-swinging blades each to reduce the shock of hitting a stationary object. Slip clutches protect the gearboxes and drivelines from damage. Standard equipment includes driveline shields, clutch shields, chain discharge shields, and a towing safety chain.

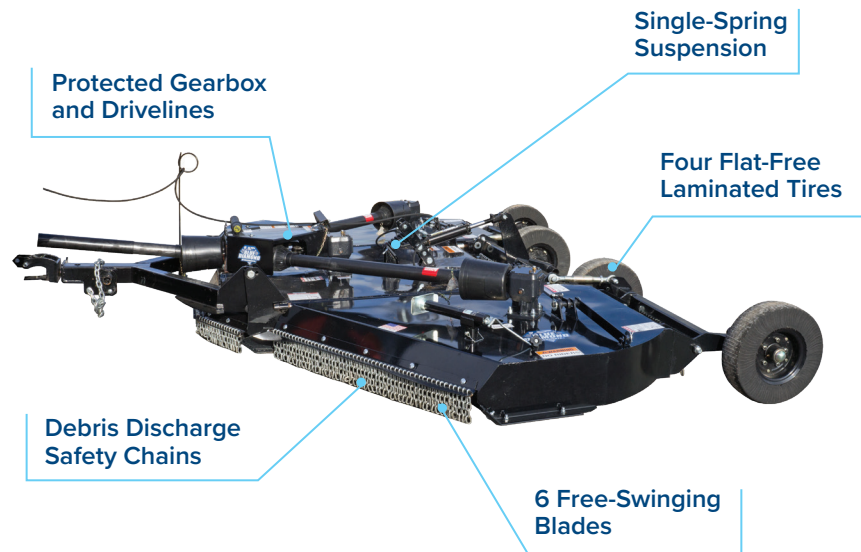

Single-spring suspension



Four flat-free tires



6 free-swinging blades

KEY FEATURES

- ◆ 144" cutting width
- ◆ Up to 2" cut capacity
- ◆ Minimum 35 PTO HP (gear-drive trans)
- ◆ Protected gearboxes and drivelines
- ◆ Smooth top deck design
- ◆ Comes standard with single row chain shields and towing safety chain
- ◆ Debris discharge safety chains
- ◆ 6 free-swinging blades
- ◆ Storage for jack stand when not in use
- ◆ Single-circuit hydraulics; only 1 hose connection required
- ◆ Single-spring suspension
- ◆ Replaceable skid shoes
- ◆ 4 flat-free laminated tires
- ◆ Aircraft tires option available
- ◆ 5-year limited gearbox and 2-year workmanship warranty

PART NUMBER/MODEL	403150 / 12'
OVERALL DIMENSIONS	151"W X 158"L (LENGTH WITH WHEELS)
CUTTING WIDTH	144"
CUTTING CAPACITY	UP TO 2"
HITCH	SWIVEL CLEVIS
DECK THICKNESS / HEIGHT	10 GA / 11"
SIDE SKIRT MATERIAL	3/16"
OUTBOARD GEARBOX	75 HP
SPLITTER GEARBOX	175 HP
GEARBOX	540 RPM
BLADES	1/2" X 3" W/LIFT
BLADE TIP SPEED	15,657 FPM
BLADE OVERLAP	6"
INPUT / WING DRIVE PTO	ASAE CAT 5 CONSTANT VELOCITY / ASAE CAT 4 W/SLIP CLUTCH
BLADE CARRIERS	3/16" FORMED PLATE WITH 3/4" X 6" BLADE BAR
REPLACEMENT BLADE KIT	503254-KIT-12 (6 BLADES W/HARDWARE)
AIRCRAFT 22" TIRE (FOAM FILLED)	503686
WEIGHT	2,630 LBS