

POWER RAKE HEAVY DUTY SERIES 2




Hydraulic or Manual Angle Mounts

Reversible Side Shields

Flip Up Wheels

Bolt-On Skid Shoes Come Standard

No Flat Airless Tires

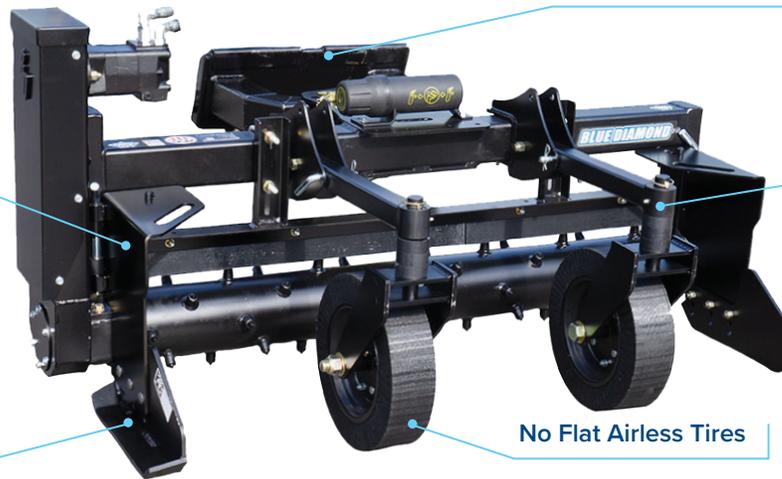

The **Blue Diamond® Heavy Duty Series 2 Duty Power Rake** follows close on the heels of our previously released Severe Duty model. This lighter unit is suited to smaller frame skid steers and walk behind machines. The bolt-on mount allows greater flexibility for rental companies and dealers to have the correct model for the right machine.

*Over 3,000 PSI requires a case drain

KEY FEATURES

- ◆ Available in 48" to 72" working widths
- ◆ 7" diameter drum with 1.5" teeth
- ◆ Chain drive unit for increased torque
- ◆ Pre-lubricated chain for easy service
- ◆ Spindles on drum are 1 3/8" diameter in greaseable bearings
- ◆ Overall width 9" more than drum width
- ◆ 7/8" greaseable axles on flip up wheels
- ◆ 1.25" spindles with adjustable height
- ◆ Bolt-on skid shoes, universal wiring harness, and 1/2" hose couplers included



Reversible side shields



Flip up wheels



Heavy duty protected bearings

PART NO.	332400	332401	332402	332403	332406	332407	332408	332409	332410	332411
MODEL	48" W/FIXED CARBIDE TEETH, SKID STEER MOUNT	48" W/FIXED CARBIDE TEETH, SKID STEER MOUNT	48" W/ REPLACEABLE CARBIDE TEETH, SKID STEER MOUNT	48" W/ REPLACEABLE CARBIDE TEETH, SKID STEER MOUNT	60" W/ REPLACEABLE CARBIDE TEETH, SKID STEER MOUNT	60" W/ REPLACEABLE CARBIDE TEETH, SKID STEER MOUNT	72" W/FIXED CARBIDE TEETH, SKID STEER MOUNT	72" W/FIXED CARBIDE TEETH, SKID STEER MOUNT	72" W/ REPLACEABLE CARBIDE TEETH, SKID STEER MOUNT	72" W/ REPLACEABLE CARBIDE TEETH, SKID STEER MOUNT
FLOW RANGE	15-24 GPM	15-24 GPM	15-24 GPM	15-24 GPM	15-24 GPM	15-24 GPM	15-24 GPM	15-24 GPM	15-24 GPM	15-24 GPM
MANUAL OR HYDRAULIC ANGLE	MANUAL ANGLE	HYDRAULIC ANGLE	MANUAL ANGLE	HYDRAULIC ANGLE	MANUAL ANGLE	HYDRAULIC ANGLE	MANUAL ANGLE	HYDRAULIC ANGLE	MANUAL ANGLE	HYDRAULIC ANGLE
WEIGHT	700 LBS	756 LBS	713 LBS	758 LBS	706 LBS	751 LBS	899 LBS	947 LBS	823 LBS	871 LBS

Skid Shoes and Universal Wiring Harness Included, 1/2" Hose Couplers Standard. Full angled widths are estimated about 10"-12" less. Recommended flow is 15-24 GPM.