




POWER RAKE MINI STANDARD DUTY

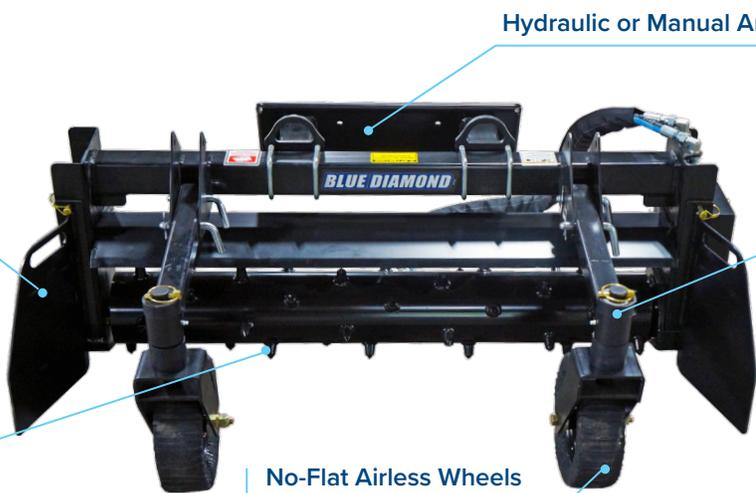

Hydraulic or Manual Angle Mounts

Reversible Side Shields

Flip Up Wheels

Fixed Carbide Teeth

No-Flat Airless Wheels

The **Blue Diamond® Standard Duty Power Rake** is a lighter unit that is suited to smaller frame skid steers and walk behind machines. The bolt-on mount allows greater flexibility for rental companies and dealers to have the correct model for the right machine, comes standard with full size skid steer mount. Mini skid steer mounts are available.

KEY FEATURES

- ◆ Flip up wheels
- ◆ No-flat airless wheels
- ◆ Drum width is 48" and 60"
- ◆ 5/8" greaseable axles on wheels
- ◆ 7" diameter drum with 1.5" teeth
- ◆ Overall width 12" more than drum width
- ◆ 1.25" spindles with adjustable height
- ◆ Bolt-on mini or full size skid steer mount
- ◆ Spindles on drum are 1 3/8" diameter greaseable bearings
- ◆ Fixed carbide teeth come standard



Reversible side shields



Flip up wheels



Heavy duty protected bearings

PART NO.	332450	332451	332452	332453	332454	332455	232580	232581	232582	232583	232584	232585	232586
MODEL	48" W/ FIXED CARBIDE TEETH & SKID STEER MOUNT	48" W/FIXED CARBIDE TEETH & SKID STEER MOUNT	48" W/FIXED CARBIDE TEETH & SKID STEER MOUNT	60" W/ FIXED CARBIDE TEETH & SKID STEER MOUNT	60" W/FIXED CARBIDE TEETH & SKID STEER MOUNT	60" W/FIXED CARBIDE TEETH & SKID STEER MOUNT	HYDRAULIC ANGLE KIT 96" WIRE HARNESS EXTENSION	HYDRAULIC 16" WIRE HARNESS, 14-PIN	HYDRAULIC 16" WIRE HARNESS, 8-PIN	HYDRAULIC UNIVERSAL WIRE HARNESS	HYDRAULIC 12" WIRE HARNESS, 2-PIN TO 12-VOLT PLUG	HYDRAULIC 12" WIRE HARNESS, 2-PIN TO ALLIGATOR CLIP	HYDRAULIC 12" WIRE HARNESS, 2-PIN TO PIG TAIL
FLOW RANGE	10-20 GPM	10-20 GPM	10-20 GPM	15-20 GPM	15-20 GPM	15-20 GPM	—	—	—	—	—	—	—
MANUAL OR HYDRAULIC ANGLE	—	MANUAL ANGLE	HYDRAULIC ANGLE	—	MANUAL ANGLE	HYDRAULIC ANGLE	—	—	—	—	—	—	—
WEIGHT	550 LBS	600 LBS	625 LBS	600 LBS	650 LBS	675 LBS	1LB	1LB	1LB	1LB	1LB	1LB	1LB

Add -25 for Mini Universal and add -26 for Bobcat MT. Weight varies on mount. Requires wire harness. Only comes with the fixed carbide teeth (232112). Confirm the location of the electrical connection. Full angled widths are estimated about 10"-12" less. Recommended flow is 10-20 GPM for 48" and 15-20 GPM for 60".