



ROAD SAW


EXTREME DUTY



Blue Diamond® Extreme Duty Road Saws

deliver unmatched efficiency for trenching in asphalt, concrete, and rock. Designed with hydraulic depth control, side shift, and built-in trench clearing, these attachments cut cleaner, faster, and more accurately than traditional methods. Designed for cutting asphalt and soil trenching, our skid steer road wheel saws offer cutting depths up to 17 or 24 inches!

From utility installation and roadwork to fiber optic projects, Blue Diamond® Extreme Duty Road Saws offer the flexibility and performance contractors need for dependable trenching in any environment.

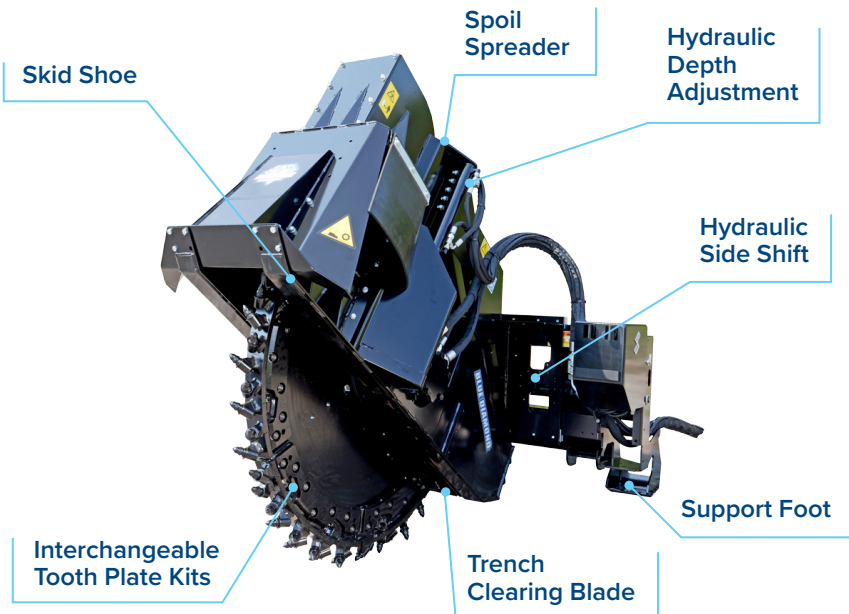

Hydraulic scraper blade



Material flow diverter



Predrilled holes for optional water tank



Depth gauge provides uniform depth for cut control



Hydraulic side shift 0" — 18"



Interchangeable tooth plate kits, cutting widths from 2" to 8"

KEY FEATURES

- ◆ Two Road Saw models: 6" to 17" and 8" to 24" cutting depths
- ◆ Saw discs feature interchangeable tooth plate kits with cutting widths from 2" to 8"
- ◆ Recommend hydraulic flow: 21-42 GPM
- ◆ Hydraulic Side shift: 0 to 18 inches
- ◆ Hydraulic depth adjustment
- ◆ Trench clearing scraper blade
- ◆ Water system available
- ◆ Universal Skid Steer Mount

PART NUMBER	361120	361121	361122	361123	361124	361125	361130	361131	361132	361133	361134
OVERALL DIMENSIONS	75"L X 65"H X 68 1/2"W						84"L X 76"H X 68 1/2"W				
CUTTING DEPTH	6" — 17"						8" — 24"				
CUTTING WIDTH	2"	3 1/4"	4"	5"	6 1/4"	8"	3 1/4"	4"	5"	6 1/4"	8"
OPERATING PRESSURE	2320 — 4350 PSI						2320 — 4350 PSI				
MIN-MAX FLOW	21 — 42 GPM						24 — 42 GPM				
DRUM SPEED	55 — 110 RPM						55 — 95 RPM				
MAX HYDRAULIC MOTOR POWER	65 HP						65 HP				
WEIGHT	2,452 LBS	2,476 LBS	2,523 LBS	2,565 LBS	2,653 LBS	2,664 LBS	3,435 LBS	3,453 LBS	3,441 LBS	3,536 LBS	3,621 LBS

