



TRENCHER



EXTREME DUTY



The **Blue Diamond® Extreme Duty Trencher** is engineered to deliver maximum productivity and precision. With cutting depths up to 48" and an adjustable depth control system, operators can trench faster, cleaner, and with greater accuracy.

Its unique design maintains consistent digging depth while efficiently removing spoil and producing finely crumbled material for easier backfill and compaction. This minimizes ground disturbance and leaves a clean, professional finish.


Built for contractors who demand performance, durability, and reliability, the Extreme Duty Trencher is proudly **Made in the USA with American components.**

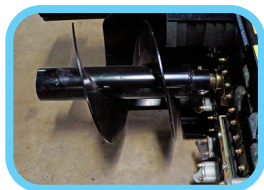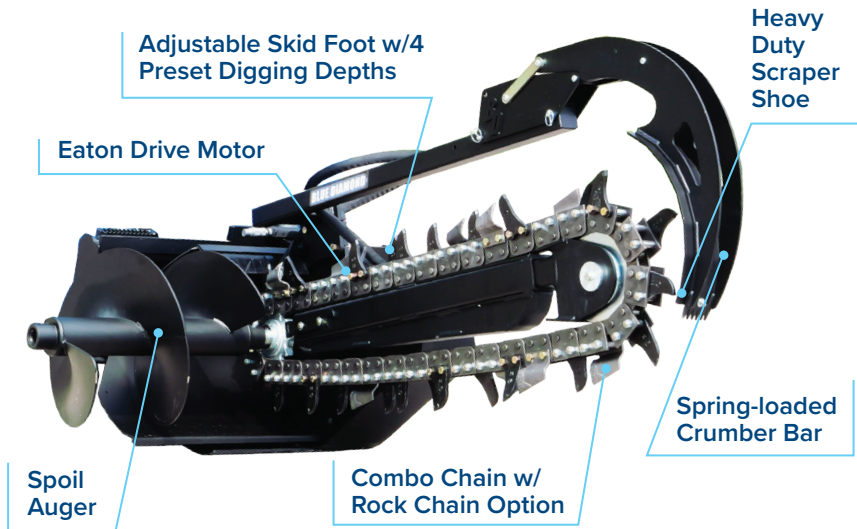

Spoil auger removes debris



Adjustable foot keeps trench depth constant

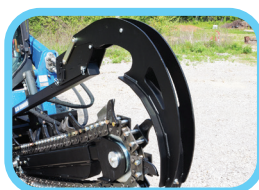

Self-adjusting crumber sweeps the trench clean

KEY FEATURES

- ◆ **Chain Styles:** Dirt, Combo, and Rock for different soil conditions
- ◆ **Manual Sideshift Mount:** Allows precise trench positioning
- ◆ **High-Torque Drive:** Bell Eaton motor with planetary drive for maximum power
- ◆ **Hoses, Crumber, and Couplers:** Included
- ◆ **Universal Skid Steer Mount**

CUTTING WIDTH	6"	6"	6"	8"	8"	8"	10"	10"	10"	12"	12"	12"
PART NUMBER	331570	331574	331578	331571	331575	331579	331572	331576	331580	331573	331577	3315871
CUTTING DEPTH	UP TO 48"	UP TO 48"	UP TO 48"	UP TO 48"	UP TO 48"	UP TO 48"	UP TO 48"	UP TO 48"	UP TO 48"	UP TO 48"	UP TO 48"	UP TO 48"
CHAIN	DIRT	COMBO	ROCK	DIRT	COMBO	ROCK	DIRT	COMBO	ROCK	DIRT	COMBO	ROCK
FOOT DEPTH PRESETS	24" / 32" / 40" / 48"	24" / 32" / 40" / 48"	24" / 32" / 40" / 48"	24" / 32" / 40" / 48"	24" / 32" / 40" / 48"	24" / 32" / 40" / 48"	24" / 32" / 40" / 48"	24" / 32" / 40" / 48"	24" / 32" / 40" / 48"	24" / 32" / 40" / 48"	24" / 32" / 40" / 48"	24" / 32" / 40" / 48"
RECOMMENDED FLOW	16-30 GPM	16-30 GPM	16-30 GPM	16-30 GPM	16-30 GPM	16-30 GPM	16-30 GPM	16-30 GPM	16-30 GPM	16-30 GPM	16-30 GPM	16-30 GPM
MAX PRESSURE	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM
MAX FLOW	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI
MAX CONTINUOUS POWER	34 HP	34 HP	34 HP	34 HP	34 HP	34 HP	34 HP	34 HP	34 HP	34 HP	34 HP	34 HP
DIMENSIONS	100"L X 31"H X 48"W	100"L X 31"H X 48"W	100"L X 31"H X 48"W	100"L X 31"H X 48"W	100"L X 31"H X 48"W	100"L X 31"H X 48"W	100"L X 31"H X 48"W	100"L X 31"H X 48"W	100"L X 31"H X 48"W	100"L X 31"H X 48"W	100"L X 31"H X 48"W	100"L X 31"H X 48"W
WEIGHT	855 LBS	855 LBS	855 LBS	855 LBS	855 LBS	855 LBS	855 LBS	855 LBS	855 LBS	855 LBS	855 LBS	855 LBS