


MINI TRENCHER

HEAVY DUTY

The Blue Diamond® Heavy Duty Trencher is engineered to deliver maximum productivity and precision. With cutting depths up to 36" and an adjustable depth control system, operators can trench faster and cleaner with mini skid steers and small CTLs.


Its unique design maintains consistent digging depth while efficiently removing spoil and producing finely crumbled material for easier backfill and compaction. This minimizes ground disturbance and leaves a clean, professional finish.

Built for contractors who demand performance, durability, and reliability, the Heavy Duty Trencher is proudly **Made in the USA with American components.**

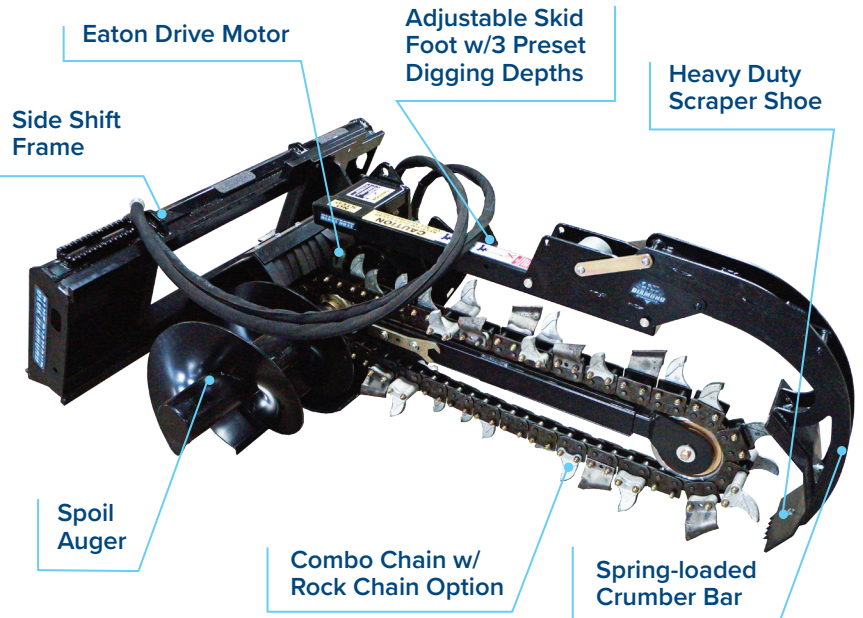


KEY FEATURES


- ♦ **Chain Styles:** Dirt, Combo, and Rock for different soil conditions
- ♦ **Manual Sideshift Mount:** Allows precise trench positioning
- ♦ **High-Torque Drive:** Bell Eaton motor with planetary drive for maximum power
- ♦ **Hoses, Crumber, and Couplers:** Included
- ♦ **Mounts:** Mini Uni (Fixed) & Bobcat MT (Sideshift)

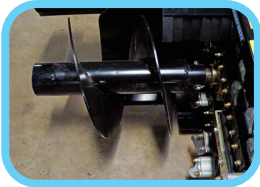

Spoil auger removes debris away from trench for faster cleanout



Adjustable skid foot keeps trench depth constant



Self-adjusting crumber sweeps the trench clean

CUTTING WIDTH	4"	4"	4"	6"	6"	6"	6"	6"	6"	8"
PART NUMBER	131520-25	131523-25	331523-26	131521-25	331521-26	131524-25	331524-26	131527-25	331527-26	131525-25
CUTTING DEPTH	UP TO 36"	UP TO 36"	UP TO 36"	UP TO 36"	UP TO 36"	UP TO 36"	UP TO 36"	UP TO 36"	UP TO 36"	UP TO 36"
CHAIN	DIRT	COMBO	COMBO	DIRT	DIRT	COMBO	COMBO	ROCK	ROCK	COMBO
MOUNT	MINI UNI	MINI UNI	BOBCAT MT	MINI UNI	BOBCAT MT	MINI UNI	BOBCAT MT	MINI UNI	BOBCAT MT	MINI UNI
FOOT DEPTH PRESETS	24" / 30" / 36"	24" / 30" / 36"	24" / 30" / 36"	24" / 30" / 36"	24" / 30" / 36"	24" / 30" / 36"	24" / 30" / 36"	24" / 30" / 36"	24" / 30" / 36"	24" / 30" / 36"
RECOMMENDED FLOW	13-25 GPM	13-25 GPM	13-25 GPM	13-25 GPM	13-25 GPM	13-25 GPM	13-25 GPM	13-25 GPM	13-25 GPM	13-25 GPM
MAX PRESSURE	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM	3,500 PSI @ 16 GPM
MAX FLOW	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI	25 GPM @ 2,900 PSI
MAX CONTINUOUS POWER	34 HP	34 HP	34 HP	34 HP	34 HP	34 HP	34 HP	34 HP	34 HP	34 HP
DIMENSIONS	76"L X 26"H X 48"W	76"L X 26"H X 48"W	76"L X 26"H X 48"W	76"L X 26"H X 48"W	76"L X 26"H X 48"W	76"L X 26"H X 48"W	76"L X 26"H X 48"W	76"L X 26"H X 48"W	76"L X 26"H X 48"W	76"L X 26"H X 48"W
WEIGHT	575 LBS	575 LBS	575 LBS	575 LBS	575 LBS	575 LBS	575 LBS	575 LBS	575 LBS	575 LBS