



POWER RAKE

MINI HEAVY DUTY SERIES 2



The Blue Diamond® Mini Skid Steer Heavy Duty Series 2 Duty Power Rake is designed

for smaller-frame skid steers and walk-behind machines, delivering professional-grade performance in a lighter, more versatile package. Following the release of our Severe Duty model, this Series 2 rake provides an ideal solution for contractors, landscapers, rental yards, and property-maintenance crews needing efficient surface preparation and cleanup.

Well suited for seedbed preparation, soil cultivation, rock and debris removal, and finish grading, the Heavy Duty Series 2 Power Rake adapts quickly to changing jobsite demands. A bolt-on mount system offers added flexibility, with mount options available for both mini and full-size skid steer machines.


Reversible Side Shields

Hydraulic or Manual Angle Mounts

Flip Up Wheels

Bolt-On Skid Shoes

No Flat Airless Tires

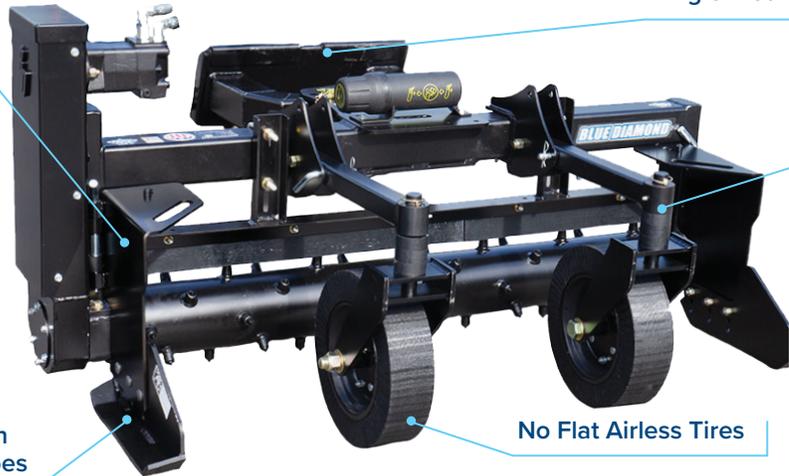

KEY FEATURES

- ◆ Available in 48" to 72" working widths
- ◆ 7" diameter drum with 1.5" teeth
- ◆ Chain drive unit for increased torque
- ◆ Pre-lubricated chain for easy service
- ◆ Spindles on drum are 1 3/8" diameter in greaseable bearings
- ◆ Overall width 9" more than drum width
- ◆ 7/8" greaseable axles on flip up wheels
- ◆ 1.25" spindles with adjustable height
- ◆ Bolt-on skid shoes, universal wiring harness, and 1/2" hose couplers included



Reversible side shields



Flip up wheels



Heavy duty protected bearings

PART NO.	332400-25	332401-25	332402-25	332403-25	332406-25	332407-25	332408-25	332409-25	332410-25	332411-25
MODEL	48" W/FIXED CARBIDE TEETH, UNIVERSAL MINI SKID STEER MOUNT	48" W/FIXED CARBIDE TEETH, UNIVERSAL MINI SKID STEER MOUNT	48" W/ REPLACEABLE CARBIDE TEETH, UNIVERSAL MINI SKID STEER MOUNT	48" W/ REPLACEABLE CARBIDE TEETH, UNIVERSAL MINI SKID STEER MOUNT	60" W/ REPLACEABLE CARBIDE TEETH, UNIVERSAL MINI SKID STEER MOUNT	60" W/ REPLACEABLE CARBIDE TEETH, UNIVERSAL MINI SKID STEER MOUNT	72" W/FIXED CARBIDE TEETH, UNIVERSAL MINI SKID STEER MOUNT	72" W/FIXED CARBIDE TEETH, UNIVERSAL MINI SKID STEER MOUNT	72" W/ REPLACEABLE CARBIDE TEETH, UNIVERSAL MINI SKID STEER MOUNT	72" W/ REPLACEABLE CARBIDE TEETH, UNIVERSAL MINI SKID STEER MOUNT
FLOW RANGE	15-24 GPM	15-24 GPM	15-24 GPM	15-24 GPM	15-24 GPM	15-24 GPM	15-24 GPM	15-24 GPM	15-24 GPM	15-24 GPM
MANUAL OR HYDRAULIC ANGLE	MANUAL ANGLE	HYDRAULIC ANGLE	MANUAL ANGLE	HYDRAULIC ANGLE	MANUAL ANGLE	HYDRAULIC ANGLE	MANUAL ANGLE	HYDRAULIC ANGLE	MANUAL ANGLE	HYDRAULIC ANGLE
WEIGHT	660 LBS	704 LBS	662 LBS	706 LBS	655 LBS	699 LBS	848 LBS	894 LBS	772 LBS	818 LBS

-26 Bobcat MT Mounts available. Skid Shoes and Universal Wiring Harness Included, 1/2" Hose Couplers Standard. Full angled widths are estimated about 10"-12" less. Recommended flow is 15-24 GPM.