


GENERAL PURPOSE BUCKET




The Blue Diamond® General Purpose Buckets for skid steers are available in a variety of configurations. We offer weld-on cutting edge, bolt-on cutting edge, teeth, toothbar, or a long-bottom version. These well-engineered, low-profile buckets offer a powerful breakout force and great visibility. Buckets up to 72" wide use 3/16" material back and bottom. The 78" and larger sizes use 1/4" material. All standard buckets are 20" tall and use a 3/4" by 6" cutting edge. The standard bottom is 30" front to back, and the long-bottom bucket is 36".



PART NUMBER	MODEL	STRUCK CAPACITY	WEIGHT
108090	60" Low Profile-Smooth	10.8 CU FT	334 lbs
108095	60" Low Profile-Tooth	10.8 CU FT	384 lbs
108100	66" Low Profile-Smooth	12.2 CU FT	354 lbs
108105	66" Low Profile-Tooth	12.2 CU FT	409 lbs
108110	72" Low Profile-Smooth	13.2 CU FT	378 lbs
108115	72" Low Profile-Tooth	13.2 CU FT	437 lbs
108120	78" Low Profile-Smooth	14.3 CU FT	408 lbs
108125	78" Low Profile-Tooth	14.3 CU FT	460 lbs
108130	84" Low Profile-Smooth	15.7 CU FT	436 lbs
108135	84" Low Profile-Tooth	15.7 CU FT	515 lbs
108140	60" Low Profile-Long Bottom-Smooth	15.7 CU FT	385 lbs
108145	60" Low Profile-Long Bottom-Tooth	15.7 CU FT	434 lbs
108150	66" Low Profile-Long Bottom-Smooth	17.3 CU FT	426 lbs
108155	66" Low Profile-Long Bottom-Tooth	17.3 CU FT	472 lbs
108160	72" Low Profile-Long Bottom-Smooth	18.6 CU FT	448 lbs
108165	72" Low Profile-Long Bottom-Tooth	18.6 CU FT	509 lbs
108170	78" Low Profile-Long Bottom-Smooth	20 CU FT	480 lbs
108180	84" Low Profile-Long Bottom-Smooth	22 CU FT	600 lbs

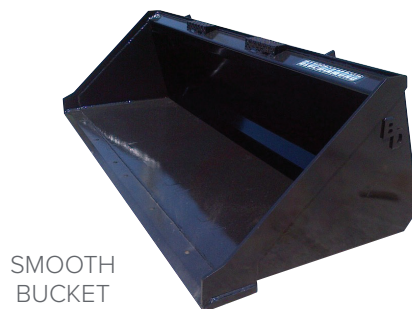

SMOOTH
BUCKET

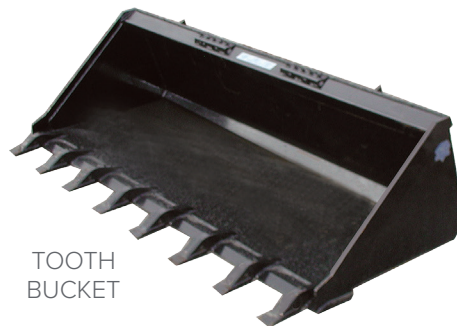

TOOTH
BUCKET

FEATURES INCLUDE

- Standard Profile: 20" high, 29" deep
- Long Bottom: 20" high, 39" deep
- 3/16" wrap
- 3/4" x 6" cutting edge

Not recommended for Track Machines



888-376-7027



info@bluediamondattachments.com



BlueDiamondAttachments.com



888-377-7027



4512 Anderson Rd., Knoxville, TN 37918



Monday - Friday, 8am - 5pm EST

