



POWER RAKE MINI STANDARD DUTY



The **Blue Diamond® Standard Duty Power Rake** is designed for finish grading, seedbed preparation, soil conditioning, and landscape renovation. Featuring a 48-inch drum with durable carbide teeth, it pulverizes compacted soil, removes rocks and debris, and creates a smooth, professional finish for landscaping and turf applications.

Designed for mini skid steers, the Mini Power Rake is available with fixed, manual, or hydraulic angle adjustment and a versatile bolt-on mounting system. Heavy-duty greaseable components and no-flat airless wheels provide long-lasting durability and dependable performance.

Designed for mini skid steers, the Mini Power Rake is available with fixed, manual, or hydraulic angle adjustment and a versatile bolt-on mounting system. Heavy-duty greaseable components and no-flat airless wheels provide long-lasting durability and dependable performance.



Reversible side shields




Flip up wheels



Heavy duty protected bearings

Reversible Side Shields

Fixed, Hydraulic, or Manual Angle Mounts

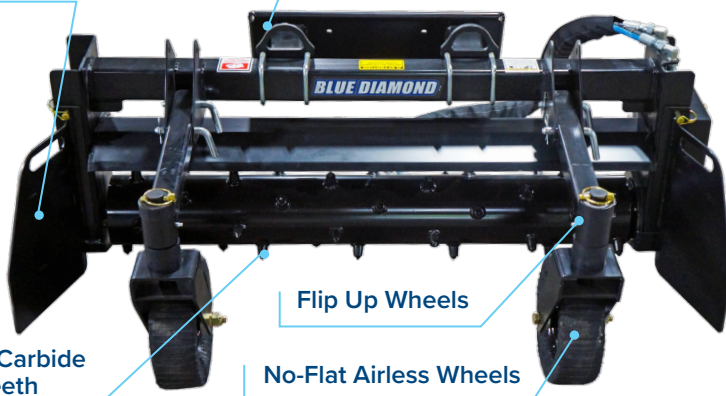

Flip Up Wheels

Fixed Carbide Teeth

No-Flat Airless Wheels

KEY FEATURES

- ◆ 48" drum width
- ◆ 7" diameter drum with 1.5" teeth
- ◆ Fixed carbide teeth
- ◆ Available with fixed, manual, and hydraulic angle options
- ◆ Flip up no-flat airless wheels
- ◆ 5/8" greaseable axles on 1.25" spindles with adjustable height
- ◆ 1 3/8" diameter greaseable drum spindle bearings
- ◆ Reversible side shields
- ◆ Overall width 12" more than drum width
- ◆ Hoses and couplers are included
- ◆ Bolt-on: Universal Skid steer, Mini Universal, and Bobcat MT mount options

PART NO.	332450-25	332451-25	332451-26	332452	232580	232581	232582	232583	232584	232585	232586
MODEL	48" W/FIXED CARBIDE TEETH, MINI UNI MOUNT	48" W/FIXED CARBIDE TEETH, MINI UNI MOUNT	48" W/FIXED CARBIDE TEETH, BOBCAT MT MOUNT	48" W/FIXED CARBIDE TEETH, SKID STEER MOUNT	HYDRAULIC ANGLE KIT 96" WIRE HARNESS EXTENSION	HYDRAULIC 16" WIRE HARNESS, 14-PIN	HYDRAULIC 16" WIRE HARNESS, 8-PIN	HYDRAULIC UNIVERSAL WIRE HARNESS	HYDRAULIC 12" WIRE HARNESS, 2-PIN TO 12-VOLT PLUG	HYDRAULIC 12" WIRE HARNESS, 2-PIN TO ALLIGATOR CLIP	HYDRAULIC 12" WIRE HARNESS, 2-PIN TO PIG TAIL
FLOW RANGE	10-20 GPM	10-20 GPM	10-20 GPM	10-20 GPM	—	—	—	—	—	—	—
MANUAL OR HYDRAULIC ANGLE	FIXED ANGLE	MANUAL ANGLE	MANUAL ANGLE	HYDRAULIC ANGLE	—	—	—	—	—	—	—
WEIGHT	550 LBS	600 LBS	600 LBS	625 LBS	1 LB	1 LB	1 LB	1 LB	1 LB	1 LB	1 LB

Weight varies on mount. Requires wire harness.

