


# COLD PLANER

## HIGH-FLOW & LOW-FLOW




The Blue Diamond® Cold Planer uses the most trusted components in the industry, from the Sauer piston motor, to the Fairfield planetary hub featured in the high-flow models. These high end components, combined with the highly engineered design, makes this one of the most reliable units available for a skid steer attachment.

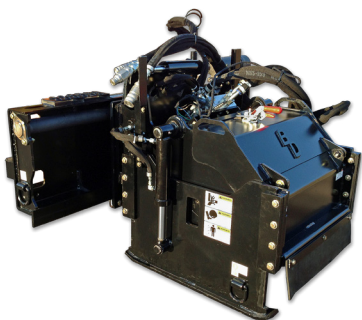

COLD PLANER HIGH-FLOW

### FEATURES INCLUDE

- Electronic adjustment controls
- High-torque, planetary drive
- High drum weight = less vibration
- 5/8" thick drum tube
- Easy access tooth replacement
- Water kit available
- Fine-cut drum available
- 16" - 48" Grinding Widths
- Up to 6" Cutting Depth

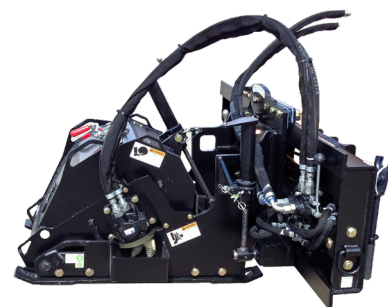

COLD PLANER LOW-FLOW

### FEATURES INCLUDE

- Manual adjustment controls
- Hydraulic side shift
- Direct Drive
- High drum weight = less vibration
- 5/8" thick drum tube
- Easy access tooth replacement
- Water kit available
- Fine-cut drum available
- 12" - 16" Grinding Widths
- Up to 5" Cutting Depth

### Applications Include:

- Removing asphalt surfaces prior to overlay
- Widening shoulders
- Repairing potholes
- Restoring drainage lines
- Mixing stabilizing agents into base for a more durable repair

PART NUMBER	MODEL	# OF TEETH	MIN-MAX FLOW	MIN-MAX PRESSURE	TILT CAPACITY	WEIGHT
160110	16" Low Flow	38	24-45 GPM	2000-3500 PSI	+/-15	1,250 lbs
160220-HP	16" High Flow	38	27-45 GPM	2450-5000 PSI	+/-15	1,710 lbs
160225	18" High Flow	40	24-45 GPM	2000-3500 PSI	+/-15	1,805 lbs
160225-HP	18" High Flow	40	27-45 GPM	2450-5000 PSI	+/-15	1,810 lbs
160230	24" High Flow	50	24-45 GPM	2000-3500 PSI	+/-13	1,970 lbs
160230-HP	24" High Flow	50	27-45 GPM	2450-5000 PSI	+/-13	1,970 lbs
160235-HP	30" High Flow	60	30-45 GPM	2500-5000 PSI	+/-10	2,160 lbs
160240	40" High Flow	76	30-45 GPM	3000-3500 PSI	+/-8	2,450 lbs
160240-HP	40" High Flow	76	30-45 GPM	3000-5000 PSI	+/-8	2,455 lbs
160245-HP	48" High Flow	90	30-45 GPM	3250-5000 PSI	+/-6	3,210 lbs

